



CDW Documentation

DGX Spark Monitoring Stack

DGX Spark Monitoring Stack

What We're Building

This guide sets up a **production-grade, end-to-end GPU/CPU observability stack** on an NVIDIA DGX Spark. By the end you will have:

- **Real-time terminal monitoring** of CPU cores, GPU utilization, power, temperature, and memory via a live TUI
- **A secured Prometheus metrics endpoint** on the Spark, protected by a Bearer token, scraping every 5 seconds
- **Grafana dashboards** running in Docker that visualize all metrics with live auto-refresh
- **Validated load testing** via a built-in synthetic CPU + GPU load generator

The full data path is:

```
nv-monitor (host) → Prometheus (Docker) → Grafana (Docker) → Your Mac browser (SSH tunnel)
```

Overview

Component	Role
nv-monitor	Reads CPU/GPU/memory metrics from the OS and NVML; exposes a token-authenticated Prometheus /metrics endpoint
Prometheus	Scrapes and stores time-series metrics from nv-monitor every 5 seconds
Grafana	Queries Prometheus and renders live dashboards in your browser
demo-load	Synthetic CPU + GPU load generator for validating the pipeline end-to-end

All Prometheus and Grafana services run in Docker containers, keeping the host clean and easy to remove. nv-monitor runs directly on the host to access hardware interfaces.

Step 1: SSH into the DGX Spark

From your Mac terminal, SSH into the Spark:


```
ssh YOUR_USERNAME@YOUR_SPARK_IP
```

All steps below are run on the Spark unless noted otherwise.

Step 2: Install Build Dependencies

```
sudo apt install build-essential libncurses-dev -y
```

- **build-essential:** gcc, make, and standard C libraries
- **libncurses-dev:** required for the terminal UI (ncursesw wide character support)

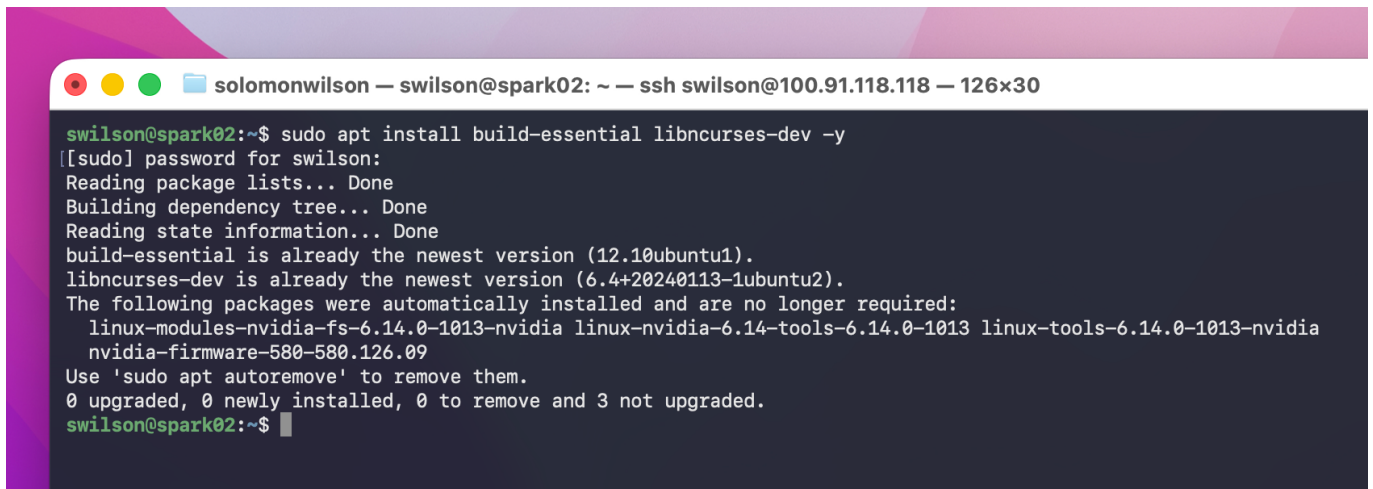


```
solomonwilson — swilson@spark02: ~ — ssh swilson@100.91.118.118 — 126x30
swilson@spark02:~$ sudo apt install build-essential libncurses-dev -y
[[sudo] password for swilson:
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
build-essential is already the newest version (12.10ubuntu1).
libncurses-dev is already the newest version (6.4+20240113-1ubuntu2).
The following packages were automatically installed and are no longer required:
  linux-modules-nvidia-fs-6.14.0-1013-nvidia linux-nvidia-6.14-tools-6.14.0-1013 linux-tools-6.14.0-1013-nvidia
  nvidia-firmware-580-580.126.09
Use 'sudo apt autoremove' to remove them.
0 upgraded, 0 newly installed, 0 to remove and 3 not upgraded.
swilson@spark02:~$
```

If already installed, apt will report “already the newest version” and exit cleanly — that is fine.

Step 3: Clone and Build nv-monitor

```
cd ~
git clone https://github.com/wentbackward/nv-monitor
cd nv-monitor
make
```

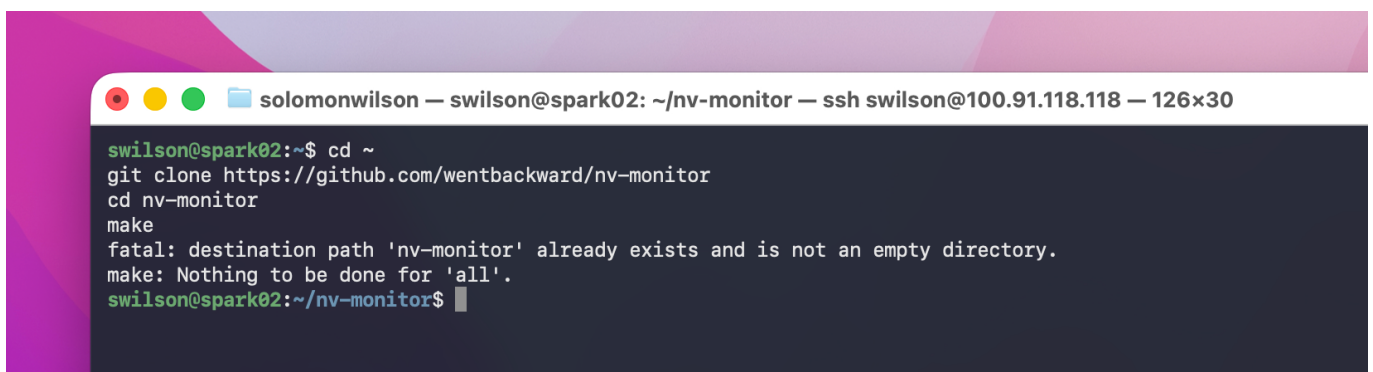

```
solomonwilson — swilson@spark02: ~/nv-monitor — ssh swilson@100.91.118.118 — 126x30
swilson@spark02:~$ cd ~
git clone https://github.com/wentbackward/nv-monitor
cd nv-monitor
make
fatal: destination path 'nv-monitor' already exists and is not an empty directory.
make: Nothing to be done for 'all'.
swilson@spark02:~/nv-monitor$
```

If the repo already exists from a previous run, git will print “destination path 'nv-monitor' already exists” and make will print “Nothing to be done for 'all'” — both are fine, the binary is already built.

Verify it works by launching the interactive TUI:

```
./nv-monitor
```

The screenshot shows the nv-monitor TUI interface. At the top, it displays the system name 'NVIDIA DGX Spark' and uptime 'up 11d 17h 17m' with load averages 'load 0.10 0.10 0.10'. The CPU section shows 20 cores at 2808 MHz and 45 C, with an overall usage of 0.2%. It lists 20 individual cores (0-19) with their types (X725 or X925) and usage percentages. The memory section shows 5.4G used, 53.6G buffer/cache, and 121.7G total, with a 48.5% usage bar. The swap section shows 0B used of 16.0G. The GPU section shows 0 GPUs at 42 C, 4.7W power draw, and 208 MHz clock speed. The interface includes a legend at the bottom: 'q:quit s:sort +/-:speed 1.0s' and a version string 'v1.7.1-2-g22ff12f'.

Press **q** to quit.

What the TUI shows


- **CPU section:** per-core usage bars, ARM core type labels (X925 = performance, X725 = efficiency)
- **GPU section:** utilization, temperature, power draw, clock speed
- **Memory section:** used, buf/cache, swap
- **VRAM:** shows “unified memory (shared with CPU)” on GB10 — this is expected, nvidiaDeviceGetMemoryInfo returns NOT_SUPPORTED on the Grace-Blackwell unified memory architecture
- **History chart:** rolling 20-sample graph of CPU (green) and GPU (cyan)

Step 4: Run nv-monitor as a Prometheus Exporter

Start nv-monitor in headless mode with a Bearer token:

```
cd ~/nv-monitor
```

```
./nv-monitor -n -p 9101 -t YOUR_SECRET_TOKEN &
```

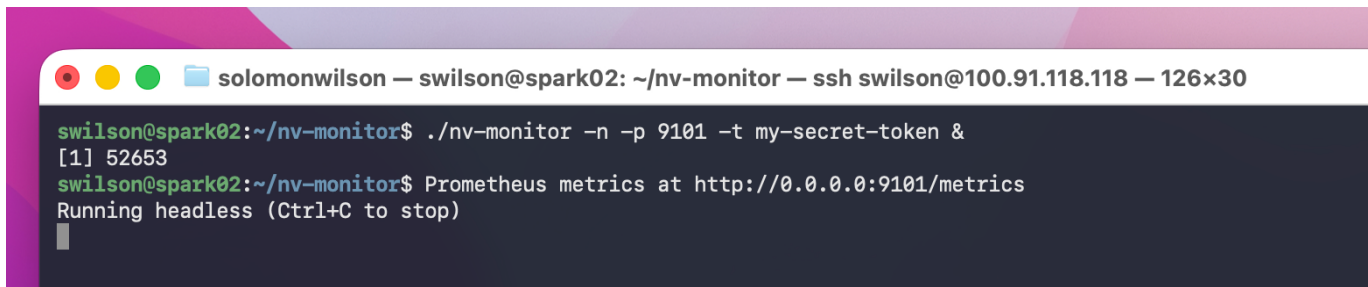

Replace YOUR_SECRET_TOKEN with a cryptographically secure token. Generate one with:

```
openssl rand -hex 32
```

Example output: a3f8c21d9e4b76f0123456789abcdef0a1b2c3d4e5f6789012345678abcdef01

You will use this same token in three places — keep it consistent:

- 1. The `-t` flag when starting `nv-monitor` (this step)
- 2. The `credentials:` field in `prometheus.yml` (Step 5)
- 3. Any `curl` commands used to verify the endpoint manually

If you ever rotate the token, update all three locations and restart both `nv-monitor` and Prometheus.

Flags explained

- **-n:** headless mode — no TUI, runs silently in the background
- **-p 9101:** expose Prometheus metrics endpoint on port 9101
- **-t YOUR_SECRET_TOKEN:** require this Bearer token on every HTTP request
- **&:** run in background so the terminal stays free

On startup it prints:

```
Prometheus metrics at http://0.0.0.0:9101/metrics  
Running headless (Ctrl+C to stop)
```

Verify it is working:

```
curl -s -H "Authorization: Bearer YOUR_SECRET_TOKEN" localhost:9101/metrics  
| head -10
```

```
solomonwilson — swilson@spark02: ~ — ssh swilson@100.91.118.118 — 120x30
swilson@spark02:~$ curl -s -H "Authorization: Bearer my-secret-token" localhost:9101/metrics | head -10
# HELP nv_build_info nv-monitor version
# TYPE nv_build_info gauge
nv_build_info{version="v1.7.1-2-g22ff12f"} 1
# HELP nv_uptime_seconds System uptime
# TYPE nv_uptime_seconds gauge
nv_uptime_seconds 1012734
# HELP nv_load_average System load average
# TYPE nv_load_average gauge
nv_load_average{interval="1m"} 0.16
nv_load_average{interval="5m"} 0.10
swilson@spark02:~$
```

You should see output starting with `# HELP nv_build_info`.

Available nv-monitor metrics


- `nv_cpu_usage_percent` — per-core CPU usage
- `nv_cpu_temperature_celsius` — CPU temperature
- `nv_gpu_utilization_percent` — GPU utilization
- `nv_gpu_power_watts` — GPU power draw in watts
- `nv_gpu_temperature_celsius` — GPU temperature
- `nv_memory_used_bytes` — RAM used in bytes
- `nv_load_average` — system load average (1m, 5m, 15m)
- `nv_uptime_seconds` — system uptime

Step 5: Create the Prometheus Configuration

```
mkdir ~/monitoring
```

```
cat > ~/monitoring/prometheus.yml << 'EOF'
global:
  scrape_interval: 5s
scrape_configs:
  - job_name: 'nv-monitor'
    authorization:
      credentials: 'YOUR_SECRET_TOKEN'
    static_configs:
      - targets: ['172.17.0.1:9101']
EOF
```

Replace `YOUR_SECRET_TOKEN` with the same token you used in Step 4.

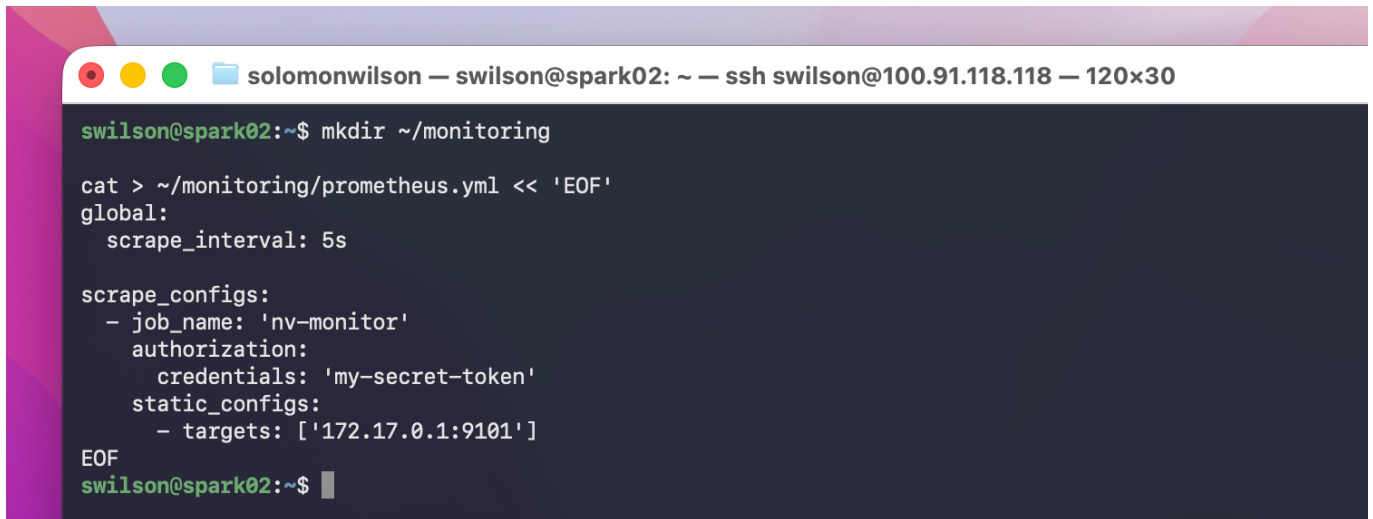A terminal window titled 'solomonwilson — swilson@spark02: ~ — ssh swilson@100.91.118.118 — 120x30'. The terminal shows the following commands and output:

```
swilson@spark02:~$ mkdir ~/monitoring
swilson@spark02:~$ cat > ~/monitoring/prometheus.yml << 'EOF'
global:
  scrape_interval: 5s

scrape_configs:
  - job_name: 'nv-monitor'
    authorization:
      credentials: 'my-secret-token'
    static_configs:
      - targets: ['172.17.0.1:9101']
EOF
swilson@spark02:~$
```

Why 172.17.0.1 and not localhost?

- Docker containers have their own network namespace
- localhost inside a container refers to the container itself, not the host machine
- 172.17.0.1 is the Docker bridge gateway — the IP that containers use to reach the host
- Verify the gateway IP on your system: `docker network inspect bridge | grep Gateway`

Step 6: Start Prometheus and Grafana in Docker

```
docker run -d \
  --name prometheus \
  -p 9090:9090 \
  -v ~/monitoring/prometheus.yml:/etc/prometheus/prometheus.yml \
  prom/prometheus
```

```
docker run -d \
  --name grafana \
  -p 3000:3000 \
  grafana/grafana
```

```
solomonwilson — swilson@spark02: ~ — ssh swilson@100.91.118.118 — 120x30
swilson@spark02:~$ docker run -d \
  --name prometheus \
  -p 9090:9090 \
  -v ~/monitoring/prometheus.yml:/etc/prometheus/prometheus.yml \
  prom/prometheus

docker run -d \
  --name grafana \
  -p 3000:3000 \
  grafana/grafana

docker network create monitoring
docker network connect monitoring prometheus
docker network connect monitoring grafana
a2fd30001b4311168a2f4faf4f05de3099edc8ab27077822031defd3186ef118
039c228c859281d3728e34684d813e87e80b3da813661914a40f89654676e42f
65c92cc5518d69286d4f420cbd84e1e2032e275333f3f937636c308714cdec44
swilson@spark02:~$
```

Connect both containers to a shared Docker network so Grafana can reach Prometheus by name:

```
docker network create monitoring
docker network connect monitoring prometheus
docker network connect monitoring grafana
```

Verify both are healthy:

```
docker ps
curl -s localhost:9090/-/healthy
curl -s localhost:3000/api/health
```

Expected responses:

- Prometheus Server is Healthy.
- {"database": "ok", ...}


```
solomonwilson — swilson@spark02: ~/nv-monitor — ssh swilson@100.91.118.118 — 126x30
[swilson@spark02:~/nv-monitor$ docker ps
curl -s localhost:9090/-/healthy
curl -s localhost:3000/api/health
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS
NAMES
039c228c8592   grafana/grafana  "/run.sh"               22 seconds ago Up 21 seconds  0.0.0.0:3000->3000/tcp, [::]:3000->3000/tcp
grafana
a2fd30001b43   prom/prometheus "/bin/prometheus --c..." 22 seconds ago Up 22 seconds  0.0.0.0:9090->9090/tcp, [::]:9090->9090/tcp
prometheus
Prometheus Server is Healthy.
{
  "database": "ok",
  "version": "12.4.2",
  "commit": "ebade4c739e1aface4ce094934ad85374887a680"
}swilson@spark02:~/nv-monitor$
```

Step 7: Allow Docker Bridge to Reach nv-monitor

Docker containers live in the 172.17.x.x subnet. The host firewall must allow them to reach port 9101.

Note: The DGX Spark does not have UFW installed. Use iptables directly:

```
sudo iptables -I INPUT -s 172.17.0.0/16 -p tcp --dport 9101 -j ACCEPT
```



This is the critical rule that allows Prometheus (running in Docker) to scrape nv-monitor (running on the host).

Verify the rule was added:

```
sudo iptables -L INPUT -n -v | grep 9101
```

You should see a line showing packets accepted from 172.17.0.0/16 on port 9101.

Troubleshooting: Permission denied on iptables

If you see `Permission denied` or `Operation not permitted`:

Check sudo access:

```
sudo -l
```

Look for `iptables` in the allowed commands list. If it is not there, contact your sysadmin.

Check if iptables is available:

```
which iptables  
iptables --version
```

If the binary is missing: `sudo apt install iptables -y`

Verify the Docker bridge gateway IP: The default Docker bridge is 172.17.0.0/16, but your system may differ:

```
docker network inspect bridge | grep Gateway
```

Replace 172.17.0.0/16 in the iptables command with the actual subnet if it differs.

Note on SUDO POLICY VIOLATION broadcast messages


The Spark has a sysadmin audit policy that broadcasts a message to all terminals when sudo is used. The command still executes — this is just a notification to the admin team. It is not an error.

Step 8: Access UIs from Your Mac via SSH Tunnel

SSH port forwarding is the recommended way to access the Grafana and Prometheus UIs from your Mac. It is simpler and more secure than opening firewall ports, and works over Tailscale.

On your **Mac**, open a **new local terminal** (not an SSH session to the Spark — the prompt must show your Mac hostname):

```
ssh -L 9090:localhost:9090 -L 3000:localhost:3000  
YOUR_USERNAME@YOUR_SPARK_IP
```

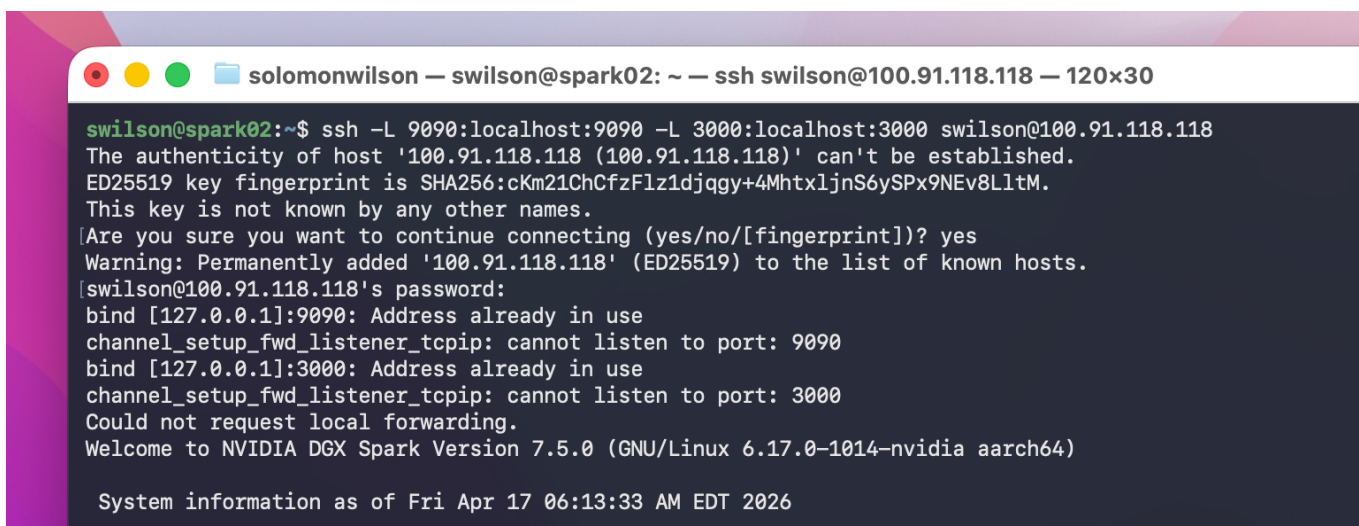

```
solomonwilson — swilson@spark02: ~ — ssh swilson@100.91.118.118 — 120x30  
swilson@spark02:~$ ssh -L 9090:localhost:9090 -L 3000:localhost:3000 swilson@100.91.118.118  
The authenticity of host '100.91.118.118 (100.91.118.118)' can't be established.  
ED25519 key fingerprint is SHA256:cKm21ChCfzFlz1djggy+4MhtxljnS6ySPx9NEv8L1tM.  
This key is not known by any other names.  
[Are you sure you want to continue connecting (yes/no/[fingerprint])? yes  
Warning: Permanently added '100.91.118.118' (ED25519) to the list of known hosts.  
[swilson@100.91.118.118's password:  
bind [127.0.0.1]:9090: Address already in use  
channel_setup_fwd_listener_tcpip: cannot listen to port: 9090  
bind [127.0.0.1]:3000: Address already in use  
channel_setup_fwd_listener_tcpip: cannot listen to port: 3000  
Could not request local forwarding.  
Welcome to NVIDIA DGX Spark Version 7.5.0 (GNU/Linux 6.17.0-1014-nvidia aarch64)  
  
System information as of Fri Apr 17 06:13:33 AM EDT 2026
```

Keep this terminal open. Then open in your Mac browser:

- **Prometheus:** <http://localhost:9090/targets>
- **Grafana:** <http://localhost:3000>

Common mistake — running the tunnel from inside the Spark

If you run the SSH tunnel command from a terminal that is already SSH'd into the Spark, it will SSH back to itself and fail with “Address already in use” — because ports 9090 and 3000 are already bound by the Docker containers on the Spark. Always run the tunnel from a Mac local terminal.

Why SSH tunneling?


- Works over Tailscale without needing to open additional firewall ports
- Traffic is encrypted by default
- Easy to disconnect by closing the terminal

Step 9: Verify Prometheus is Scraping

Open <http://localhost:9090/targets> in your browser.

You should see the **nv-monitor** job listed with:

- State: **UP** (green)
- Scrape duration: under 10ms (typically ~2ms)

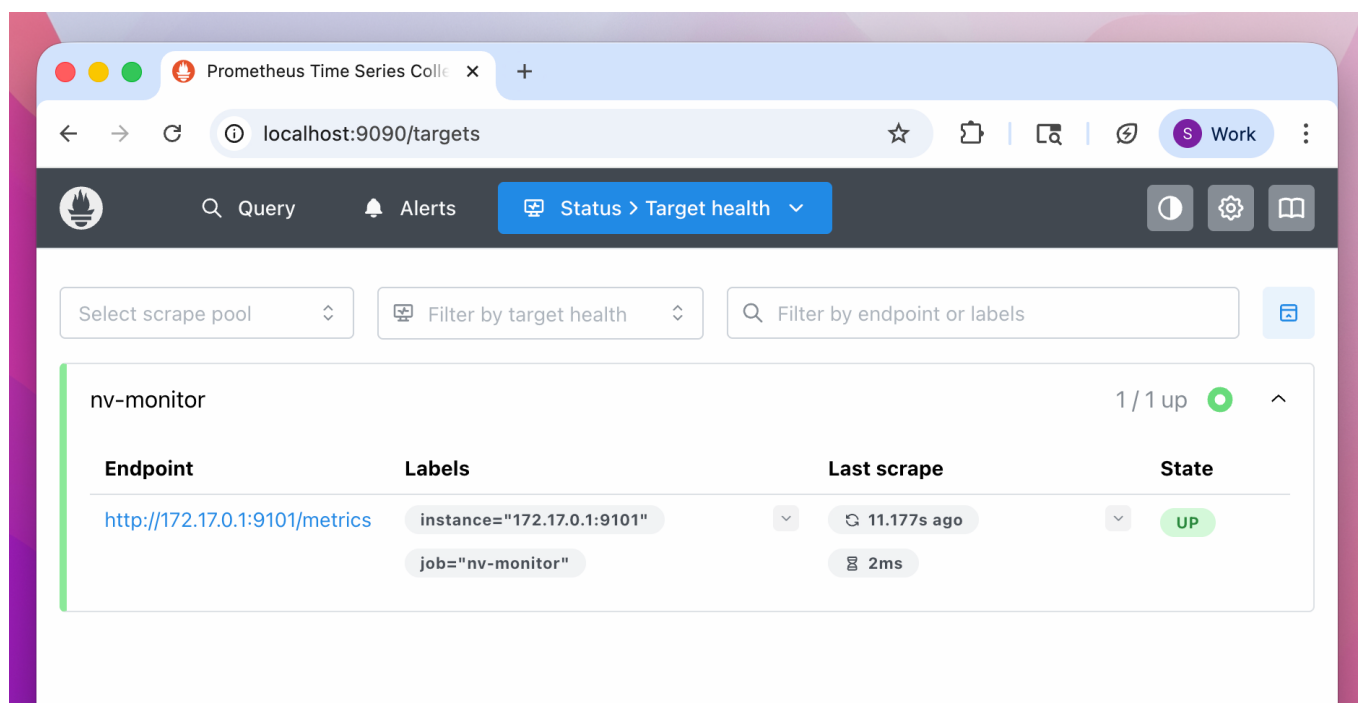


If the state shows DOWN, see the Troubleshooting section.

Step 10: Configure Grafana



Open <http://localhost:3000> in your browser.

- Login: **admin / admin**
- Set a new password when prompted

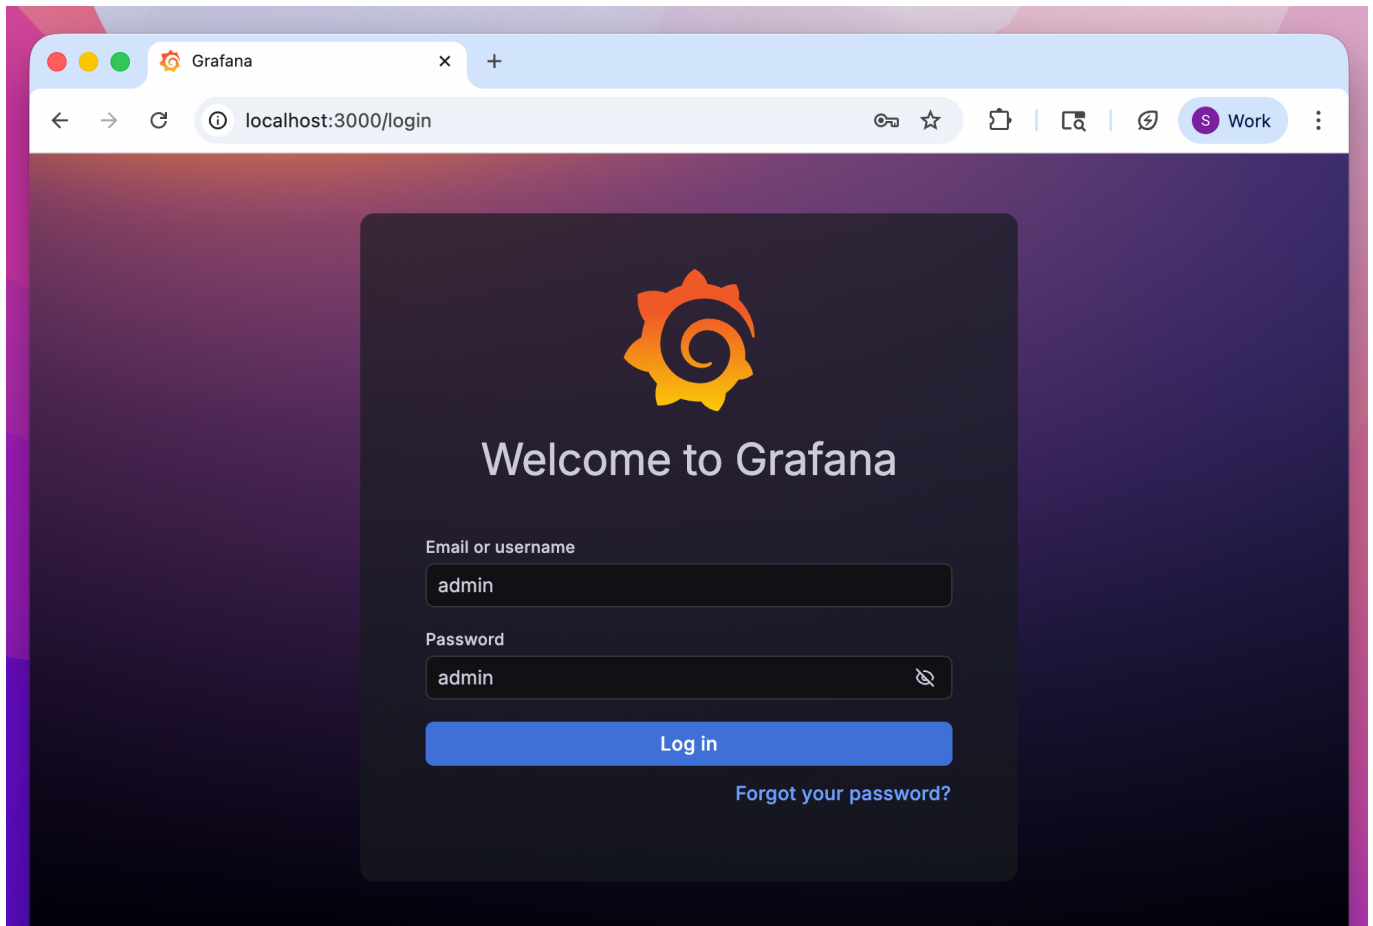

Add Prometheus as a data source

1. Click **Connections** in the left sidebar
2. Click **Data sources**
3. Click **Add data source**
4. Select **Prometheus**
5. Set URL to: <http://prometheus:9090>
6. Click **Save & test**
7. You should see: **Successfully queried the Prometheus API**

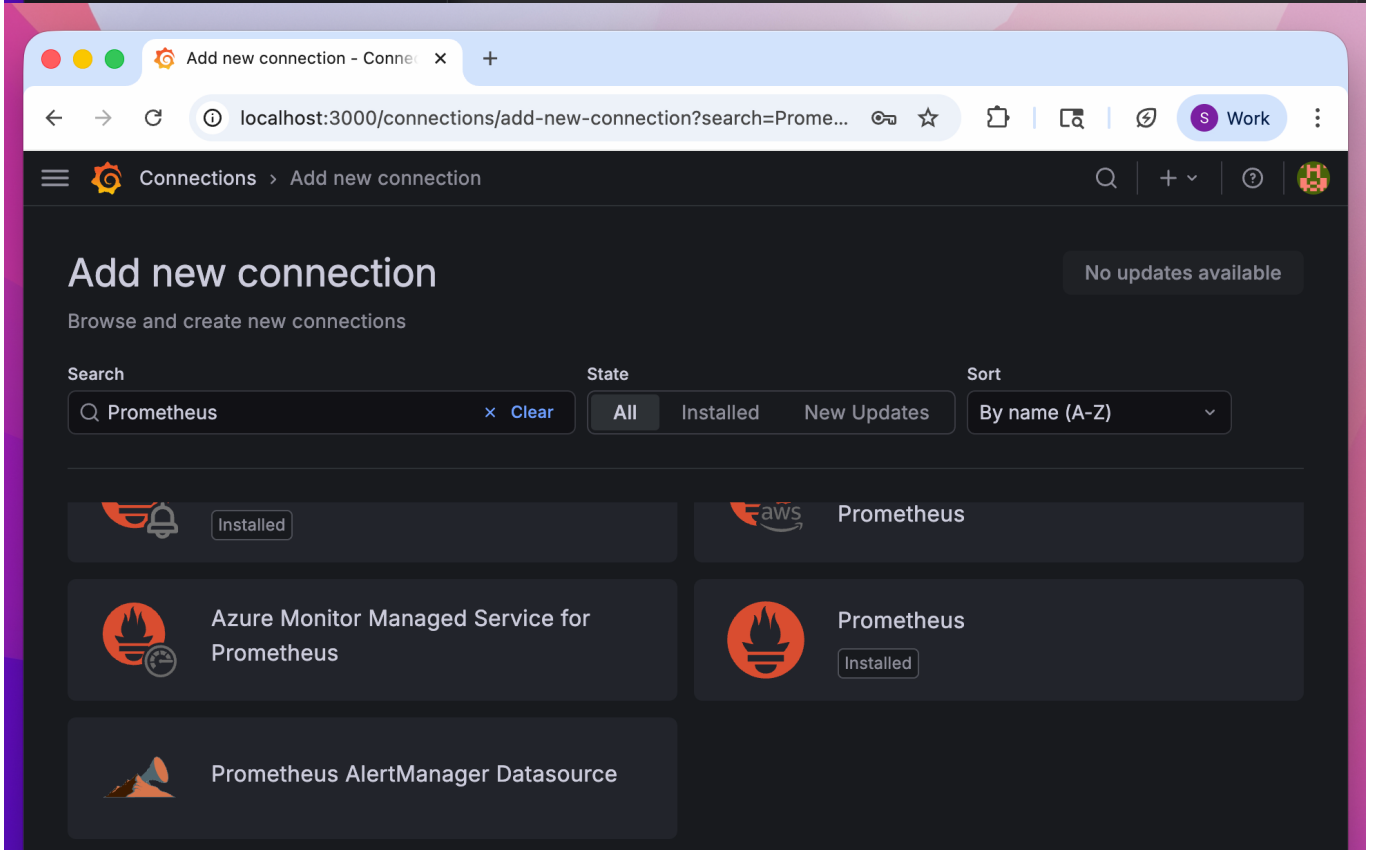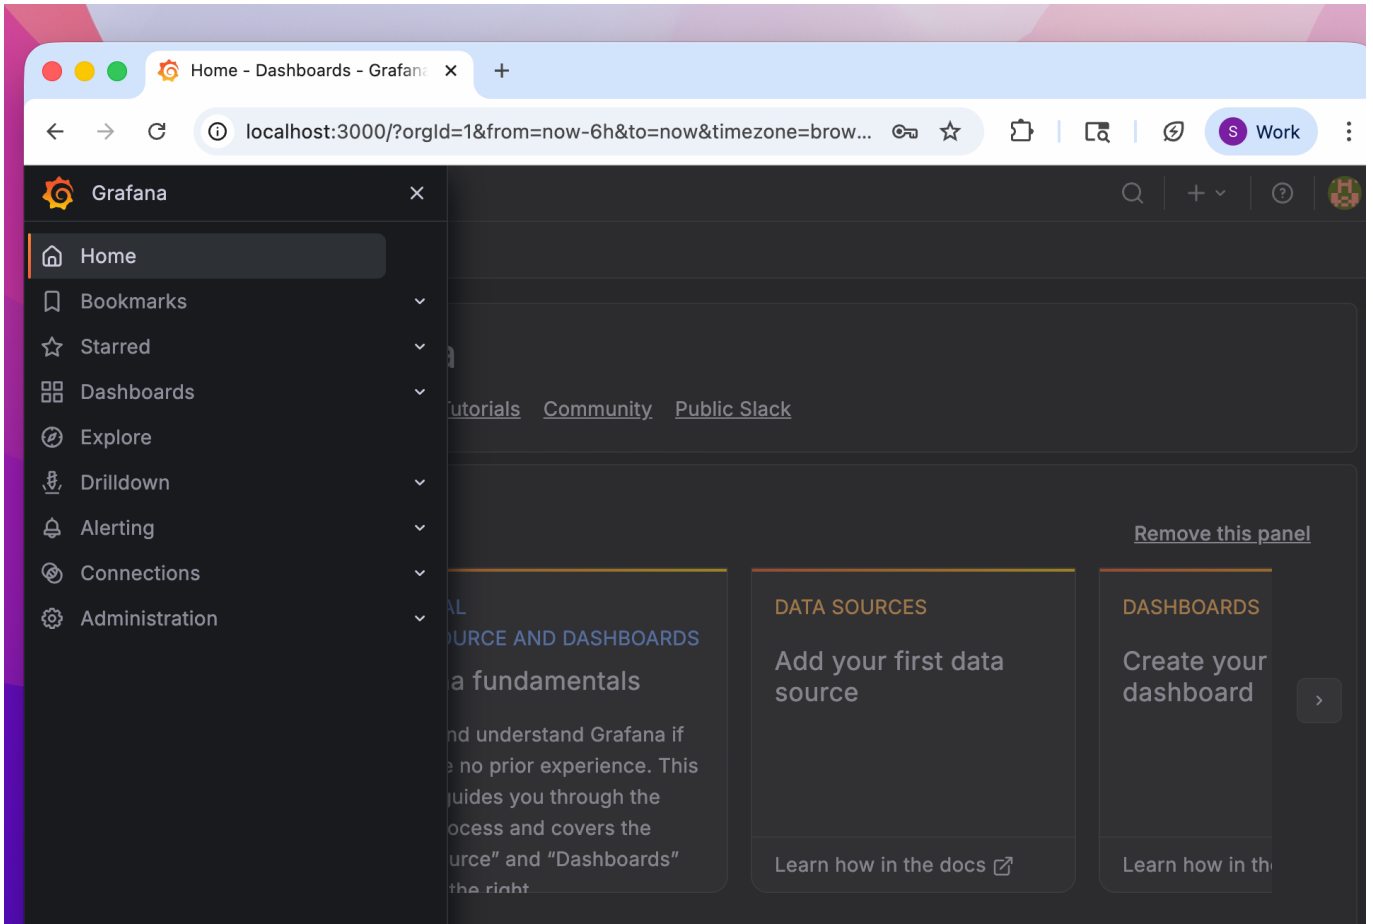

Type: Prometheus | Alerting: Supported | Explore data | Build a dashboard

Type: Prometheus

Settings | Dashboards | Permissions | Insights | Cache

Configure your Prometheus data source below
Or skip the effort and get Prometheus as fully-managed, scalable, and hosted data source from Grafana Labs with the [free-forever Grafana Cloud plan](#).

Name: prometheus-10 | Default:

Before you can use the Prometheus data source, you must configure it below or in the config file. For detailed instructions, [view the documentation](#).
Fields marked with * are required

Connection

Prometheus server URL *: http://prometheus:9090

Why "http://prometheus:9090" works

Both containers are on the same Docker network (monitoring). Docker provides DNS resolution between containers on the same network, so prometheus resolves to the Prometheus container's IP automatically. Using localhost:9090 here would not work — it would refer to the Grafana container itself.

Step 11: Build the Dashboard

All steps below are performed in the **Grafana web UI** at <http://localhost:3000> in your Mac's browser (via the SSH tunnel opened in Step 8).

1. Click **Dashboards** → **New** → **New dashboard**
2. Click + **Add visualization**
3. Add each panel below one at a time
4. For each panel: select the metric in the Builder tab, set the title in the right panel options, confirm the visualization type, then click **Back to dashboard**

Dashboard panels

- **CPU Usage %** — metric: nv_cpu_usage_percent — type: Time series
- **CPU Temperature** — metric: nv_cpu_temperature_celsius — type: Time series
- **GPU Utilization %** — metric: nv_gpu_utilization_percent — type: Time series
- **GPU Power (W)** — metric: nv_gpu_power_watts — type: Time series
- **GPU Temperature** — metric: nv_gpu_temperature_celsius — type: Time series
- **Memory Used** — metric: nv_memory_used_bytes — type: Gauge — unit: bytes (SI)

Save the dashboard. Set auto-refresh to **10s** using the dropdown next to the Refresh button.

Important: select the correct data source when adding panels

When adding each panel, confirm the Data source dropdown shows the Prometheus data source you configured (not the default placeholder). If a panel shows “No data”, check this first.

Panel shows No data

1. Change the time range to **Last 5 minutes** and click **Run queries**
2. If still no data, click **Code** in the query editor and type the metric name directly, then run queries
3. The GPU utilization panel will show a flat 0% line at idle — that is correct, not missing data

Step 12: Load Test with demo-load

demo-load is included in the nv-monitor repo and already built by make in Step 3.

```
cd ~/nv-monitor
./demo-load --gpu
```

Expected output:

```
Starting CPU load on 20 cores (sinusoidal, phased)
Starting GPU load on 1 GPU (sinusoidal)
Will stop in 5m 0s (Ctrl+C to stop early)
GPU 0: calibrating... done
GPU 0: load active
```

This generates sinusoidal CPU and GPU load simultaneously for 5 minutes. Watch the Grafana dashboard — you should see all panels spike within a few seconds:

- GPU Power: rises from ~4.5W idle to ~12W under load
- CPU Usage %: cores hitting 80-100%
- GPU Utilization: rises from 0%
- CPU Temperature: climbs from ~45°C to ~70°C+

Press **Ctrl+C** to stop early, or wait 5 minutes for it to finish automatically.

Reconnecting After Reboot or Disconnect

nv-monitor and Docker containers do not auto-restart. To bring everything back:

On the Spark:

```
cd ~/nv-monitor
./nv-monitor -n -p 9101 -t YOUR_SECRET_TOKEN &
docker start prometheus grafana
```

On your Mac (new local terminal):

```
ssh -L 9090:localhost:9090 -L 3000:localhost:3000
YOUR_USERNAME@YOUR_SPARK_IP
```

Then open <http://localhost:3000>.

Tearing Everything Down

```
docker stop prometheus grafana
docker rm prometheus grafana
docker network rm monitoring
pkill nv-monitor
rm -rf ~/monitoring
```

Troubleshooting

nv-monitor binary does not exist after git clone

A file or directory named nv-monitor already existed in the home directory before cloning.

```
rm -rf ~/nv-monitor
git clone https://github.com/wentbackward/nv-monitor
cd nv-monitor
make
```

Prometheus target shows DOWN — context deadline exceeded

Apply both fixes:

Fix 1 — Use the correct target IP in `prometheus.yml`. The target must be the Docker bridge gateway, not localhost:

```
targets: ['172.17.0.1:9101']
```

Find the correct gateway IP with: `docker network inspect bridge | grep Gateway`

Then restart Prometheus: `docker restart prometheus`

Fix 2 — Allow Docker bridge through the firewall:

```
sudo iptables -I INPUT -s 172.17.0.0/16 -p tcp --dport 9101 -j ACCEPT
```

UFW command not found

The DGX Spark does not have UFW installed. Use iptables directly (see Step 7).

SSH tunnel fails with "Address already in use"

You ran the tunnel command from inside an existing SSH session to the Spark. The Spark already has Docker containers binding ports 9090 and 3000. Open a new terminal on your Mac (prompt must show your Mac hostname, not the Spark) and run the tunnel from there.

Grafana cannot connect to Prometheus — "lookup prometheus: no such host"

The containers are not on the same Docker network. Run:

```
docker network create monitoring
docker network connect monitoring prometheus
docker network connect monitoring grafana
```

Then set the Grafana data source URL to <http://prometheus:9090>.

Browser shows ERR_CONNECTION_RESET for port 9090 or 3000

Docker's iptables rules can bypass UFW, making direct browser access unreliable. Use SSH tunneling instead (see Step 8).

Grafana panel shows No data

```
1. Check the Data source dropdown – must point to your configured Prometheus data source
```

2. Change time range to ****Last 5 minutes**** and click ****Run queries****
3. Switch to ****Code**** mode and type the metric name directly
4. GPU utilization showing 0% at idle is correct – not an error

Memory Used shows a raw number like 4003753984

No unit is set on the panel. Edit the panel → Standard options → Unit → select **bytes (SI)**.

SUDO POLICY VIOLATION broadcast messages

This is a sysadmin audit policy. The command still executes — the broadcast is just a notification to the admin team. It is not an error.

[AI Home](#)